500 GALLON FUEL TANK

SPECIFICATIONS

CAPACITY (BRIM FILL)		WEIGHT EMPTY	
US GALLONS	552	POUNDS	1,830
DIMENSIONS	L x W x H	APPROVALS	
EXTERNAL (ft)	7'6" x 3'9" x 4'3"	UL142, CAN/ULC-S601, US DOT, UN-IBC, NFPA30	



FEATURES:

Securable: Overfill protection, fitted with UL listed overfill protection device


Double-walled: 110% containment eliminates the need for spill pans, UL 142 approved.


Forklift Pockets: Full load lifting eyes, four forklift pockets and internal baffles designed to allow handling of the tank full of fuel.

Safety: Emergency venting to meet UL standards, optional gasoline vent kit

Standard fittings: 3" Fill Point; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.

Optional add-ons: Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.

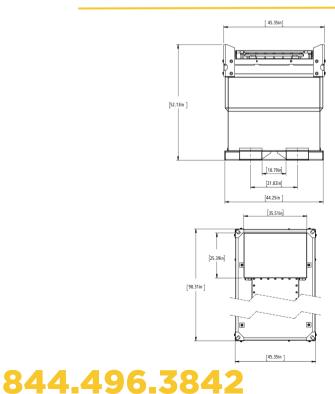

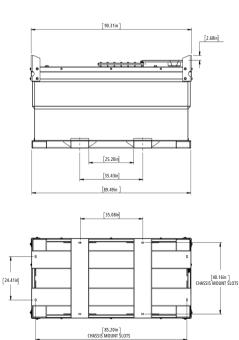

rent@on-demandrentals.com



