

# QP-25-I

QUIET POWER GENERATOR  
RENTAL SERIES

**SWP**  
Southwest Products



Powered by **ISUZU**  
DIESEL

## Complete Power Solutions

### QP-25-I

**Standby Rating: 27.5 kVA / 22 kW<sub>e</sub>**

**Prime Rating: 25 kVA / 20 kW<sub>e</sub>**

**Southwest Products QP-25-I diesel generator is engineered from the ground-up for reliability, durability, and ease-of-use.**

Built with an Isuzu Tier 4 Final engine and a compact, rugged design, the QP-25-I is a cost-effective alternative to larger units.

#### RELIABLE, STURDY, AND ENVIRONMENTALLY FRIENDLY

- Heavy-duty construction, components and paint
- Reliable 4-cycle, indirect injection, diesel engine
- Isuzu Tier 4 Final engine (50 state compliant)
- Oversized alternator with PMG for better motor starting
- Heavy gauge, powder coated, lockable enclosure
- Dual containment fuel cell with containment basin
- 2 year or 2,000 hour limited warranty
- Available with or without optional trailer
- Designed, engineered and assembled in USA

#### EXTREMELY QUIET AND FUEL EFFICIENT

- Sound attenuation for superior noise reduction
- High pressure common rail and direct injection
- Large capacity fuel cell for extended run time



#### FULL FEATURED CONTROL PANEL

- Digital controller with single-button start/stop and 2 wire auto-start
- Full capacity power outlets with lugs and outlets for customer connections
- Circuit breakers for GFCI and twist lock receptacles
- Voltage selection switch with utility power in all voltage modes

Contact SWP for Pricing and Availability

**Surprise, AZ**  
**602.269.3581**

**Signal Hill, CA**  
**562.424.0913**

**Galt, CA**  
**209.245.6000**


**Houston, TX**  
**832.957.6400**

[www.SouthwestProducts.com](http://www.SouthwestProducts.com)


## EASY TO USE CONNECTION AND SERVICE POINTS

- Up to 500 hour service intervals
- Multi-voltage switch with utility outlet power in all voltage modes
- SWP Tough Series TG410 digital genset controller
- Digital engine/generator controller with single button start/stop and 2 wire auto-start
- Optional single axle trailer 62" (W) x 129" (L)
- Custom paint and branding options available
- Single point lift

### Generator Output Panel

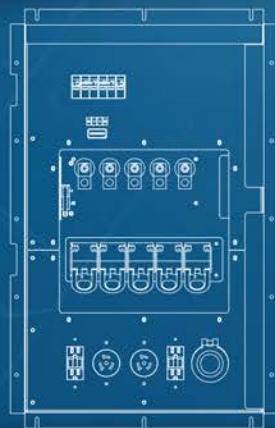

### Dimensions

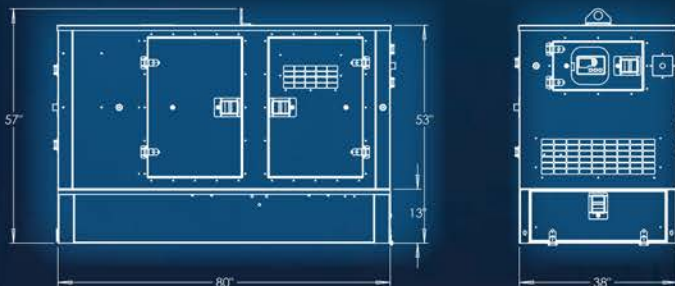

## TECHNICAL SPECIFICATIONS

Model	QP-25-I
Voltages	120/240   120/208   277/480
Standby Rating	27.5 kVA / 22 kW <sub>e</sub>
Prime Rating	25 kVA / 20 kW <sub>e</sub>
Engine Model	Isuzu 4LE2T
Alternator	Mecc Alte
Sound dBA level @ 23 ft.	62 dBA
Main Line Circuit Breaker	70 Amps

### ENCLOSURE SPECIFICATIONS

Weight - Dry	2,488 lbs
Length With Trailer	129"
Width With Trailer	62"
Height With Trailer	72"
Weight With Trailer	3,034 lb
Weight Ready to Run	3,460 lb

### ENGINE SPECIFICATIONS

Engine Mfg	Isuzu
Model Number	4LE2T
Prime Output HP (gross)	36.2
Standby Output HP (gross)	40.2
Emissions Certification	Tier 4 Final

### ALTERNATOR SPECIFICATIONS\*

277/480 Volt Prime Amps PF 0.8	30.1
277/480 Volt Standby Amps PF 0.8	33.1
120/208 Volt Prime Amps PF 0.8	69.5
120/208 Volt Standby Amps PF 0.8	76.4
120/240 Volt Prime Amps 1PH PF 1.0	50.0
120/240 Volt Standby Amps 1PH PF 1.0	55.5

\*125/40 C Temp Rise Class H Insulation

### FUEL CONSUMPTION

Fuel Tank Capacity - Gallons	60
Fuel Consumption at Prime Rating	1.8 gal/h
25% load	-
50% load	0.9 gal/h
75% load	1.3 gal/h
100% load	1.8 gal/h